


8.4.4 Ritto Twin Bus, TM3 als Bus-Netzgerät

TFE Auswahlstellung 5

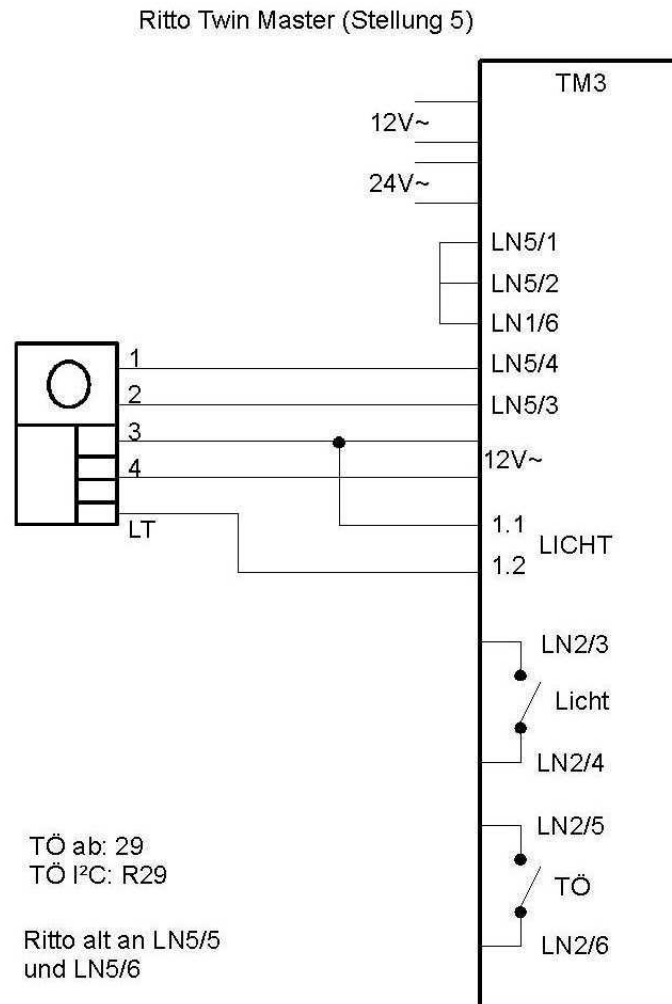

Vorschlag Einstellungen:

Ritto 14760 IIC

S3 = 2 P3 = 50%

P2 = 10%

P1 = 90%

Potis am Modul

Micro = 20%

LSP = 100%

Ritto 14760 Lab

S3 = 4 P3 = 50%

P2 = 20%

P1 = 90%

Micro = 20%

LSP = 40%