


8.4.3 Ritto Twin, TM3 als Slave

TFE Auswahlstellung ist 4

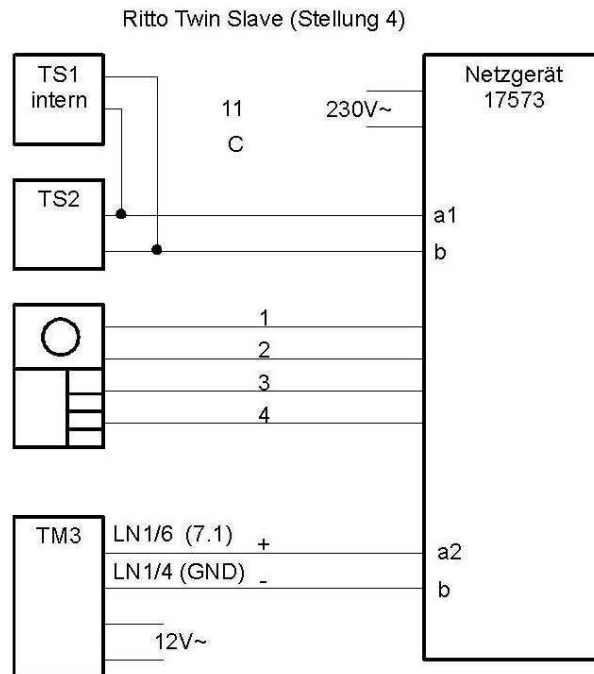

TÖ ab: 29
TÖ I²C: R29

Vorschlag Einstellungen:

Ritto 4403:

S3 = 2 P3 = 50%

P2 = 10%

P1 = 90%

Potis am Modul

Wohnung LSP = 70%

Wohnung (amR73) = 100%

Ritto 14760 IIC

S3 = 2 P3 = 40%

P2 = 20%

P1 = 95%

Micro = 50%

LSP = 30%

Ritto 14760 Lab

S3 = 2 P3 = 40%

P2 = 20%

P1 = 95%

Micro = 50%

LSP = 30%